




Head Type	Countersunk Head
Material	Aluminium Alloy
Finish	Polished

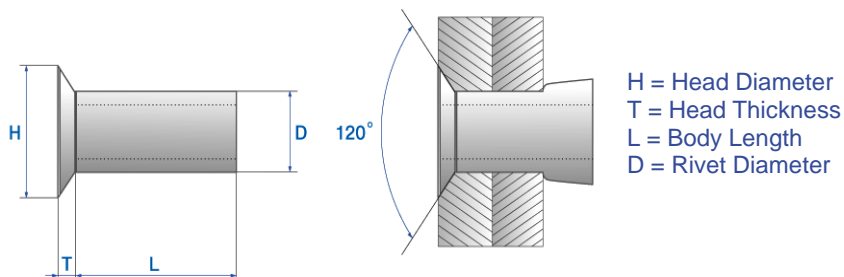

*Dimensions in millimeters

Part Number	Rivet Diameter (D) nom.	Hole Size	Body Length(L) max.	Grip Range	Head Diameter (H) max.	Head Thickness (T) max.	Standard Strength (kN) typ.	
							Shear	Tensile
SHRCAP-032032	3.2	3.28~3.34	3.3	1.00~1.50	5.8	0.9	0.90	
SHRCAP-032040			4.1	1.00~2.30				
SHRCAP-032048			4.9	1.60~3.10				
SHRCAP-032064			6.5	3.20~4.70				
SHRCAP-032079			8.1	4.80~6.30				
SHRCAP-032095			9.7	6.40~7.90				
SHRCAP-040049	4.0	4.09~4.16	4.9	1.60~3.10	6.8	1.0	1.60	
SHRCAP-040065			6.5	3.20~4.70				
SHRCAP-040081			8.1	4.80~6.30				
SHRCAP-040097			9.7	6.40~7.90				
SHRCAP-040112			11.2	8.00~9.50				
SHRCAP-040127			12.7	9.50~11.0				
SHRCAP-048057	4.8	4.85~4.93	5.7	1.60~3.10	9.2	1.4	2.00	
SHRCAP-048073			7.3	3.20~4.70				
SHRCAP-048089			8.9	4.80~6.30				
SHRCAP-048105			10.5	6.40~7.90				
SHRCAP-048120			12.0	8.00~9.50				
SHRCAP-048135			13.5	9.50~11.0				

